

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 July 2002 (04.07.2002)

PCT

(10) International Publication Number  
**WO 02/052311 A2**

(51) International Patent Classification<sup>7</sup>: **G02B 6/02**,  
H01S 3/13, 3/067

(21) International Application Number: PCT/US01/43762

(22) International Filing Date:  
16 November 2001 (16.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/252,289 21 November 2000 (21.11.2000) US  
09/993,742 6 November 2001 (06.11.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

**Published:**

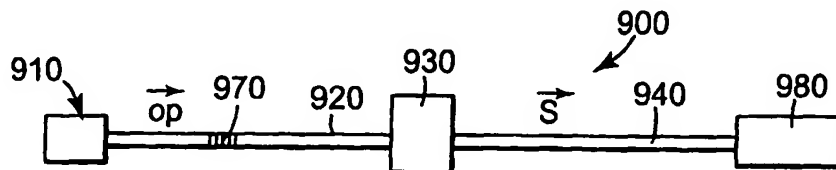
— without international search report and to be republished upon receipt of that report

(72) Inventor: **VARNER, Wayne, F.**; 3M Innovative Properties Company, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(74) Agents: **HO, Néstor, F. et al.**; 3M Innovative Properties Company, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(54) Title: **LASER PIGTAIL FIBER WITH INHERENT ATTENUATION CHARACTERISTIC**



(57) Abstract: A fiber optic telecommunication system with a pump laser and an optical amplifier is designed to stabilize the pump laser while preventing back reflections from the pump laser into the optical amplifier. The pump laser emits radiation at a shorter wavelength, while the optical amplifier emits radiation at a longer wavelength. An optical fiber is provided to connect the devices which has an ultraviolet photosensitive core, a low attenuation single mode wavelength region and a very high attenuation, longer wavelength region. The photosensitive core allows a weak Bragg grating to be written into the fiber, to stabilize the pump laser. Apparent fundamental mode cutoff is accomplished with a depressed well design to attenuate the unwanted back reflections from the pump laser into the amplifier. The pump laser is also protected from longer wavelength signal amplifier or signal laser radiation.

WO 02/052311 A2

## **LASER PIGTAIL FIBER WITH INHERENT ATTENUATION CHARACTERISTIC**

### **FIELD OF THE INVENTION**

This invention relates to a single mode optical fiber designed for connection to a laser. The fiber is transmissive at the laser's pump wavelength while strongly attenuating longer wavelengths. More particularly, the optical fiber has a depressed inner clad index profile and may be combined with a photosensitive core that permits writing of reflective gratings for laser stabilization. The fiber core is or can be substantially mode field matched to standard fibers used in optical communications devices to minimize splice losses.

### **BACKGROUND OF THE INVENTION**

The rapid growth of fiber optic telecommunications in recent years has led to an increasing need for technologies that support increased data transmission rates. Many such systems employ single mode optical fibers, erbium-doped fiber laser light sources, and erbium doped fiber amplifiers (EDFA) operating in a dense wavelength division multiplexing (DWDM) mode. Operating at closely spaced wavelengths primarily in the central erbium gain band (C band) between 1530nm - 1560nm in the near infrared, these systems can communicate as many as 100 optical signal channels. (Recent work has attempted to utilize the adjacent shorter wavelength "S band" and longer wavelength "L band" regions of the erbium gain spectrum.)

In order for the erbium atoms in an erbium-doped fiber laser or erbium-doped fiber amplifier to emit photons at 1530nm - 1560nm, they must first absorb photons with a wavelength shorter than (or equal to) the emission wavelength. These shorter wavelength photons typically come from a "pump laser," such as a semiconductor laser. In most systems, a pump laser which emits light of wavelengths around 980nm or 1480nm is used.

Lasers and optical amplifiers are sensitive to light that enters the laser cavity from reflections or other sources. This effect can be used to stabilize the operating wavelength of a laser, but generally the intrusion of light will destabilize the operating wavelength. In order to stabilize the operating wavelength, the reflected light must be within a specific

narrow wavelength range. A weak external Bragg grating is sometimes provided to reflect some light back into the cavity thereby stabilizing the laser. Destabilization of the laser diode can occur if uncontrolled light (e.g., from reflections or from other light sources) is allowed to enter the laser cavity. Often isolators are employed to prevent such destabilizing light from reaching the laser diode.

A Bragg grating is written in a section of optical fiber by creating a periodic modulation in the refractive index of the fiber core. They are generally produced by exposing a photosensitive fiber to a periodic pattern of ultraviolet (UV) light. Their fundamental property is to reflect light over a narrow spectral range centered at a resonant wavelength. Bragg gratings can be used to reflect, filter or disperse light within an optical fiber.

Long-period gratings can also be used to provide wavelength dependent loss. A long-period grating couples optical power between two copropagating modes with very low back reflections. A long-period grating typically comprises a length of optical fiber wherein a plurality of refractive index perturbations are spaced along the fiber by a periodic distance which is large compared to the wavelength of the transmitted light. Long-period fiber grating devices selectively remove light at specific wavelengths by mode conversion. In contrast with conventional Bragg gratings which reflect light, long-period gratings remove light without reflection by converting it from a guided mode to a non-guided mode.

Gratings are commonly written in optical fibers having a fiber core that is photosensitive to ultraviolet light. Photosensitivity is generally created by doping the fiber preform core with germanium during the preform fabrication process. Germanium is typically used to increase the refractive index of the fiber core. The core doped with  $\text{GeO}_2$  is often subjected to hydrogen or deuterium loading using any of several loading procedures. The hydrogen loaded fiber is then exposed to an optical interference pattern from a UV laser, which induces solid state photochemical reactions at the high light intensity "bright" fringes of the interference pattern. These photochemical reactions produce "color centers" such as electrons trapped at defect sites in the glassy material; this causes a change in the refractive index at the locations exposed to the UV light. The hydrogen, in a sense, provides an additional source of electrons for this process, and

typically increases the speed and magnitude of the refractive index change. However, the excess hydrogen slowly diffuses out of the optical fiber after the grating pattern is written, resulting in a slow change in the refractive indexes in the fiber causing a change in the reflectivity and the Bragg wavelength of the Bragg grating. Gratings are often heated for a period of time after they are written, in order to “anneal” the grating and stabilize its reflectivity and Bragg wavelength at some value which will remain constant over time. Although a short term (10 minute) elevated temperature (300°C) annealing is common to most grating fabrication to pre-age the grating, additional long term annealing of several days at a low temperature (70°C) is commonly required in hydrogen loaded fiber gratings that have been recoated. (The protective polymer coatings on optical fibers are generally removed before writing a grating in the fiber.)

Aside from the light reflected to stabilize the operating wavelength, back reflections into lasers and amplifiers are unwanted. To prevent the unwanted back reflections, it is often necessary to install bulky and expensive optical isolators near lasers or optical amplifiers.

Single mode optical fibers having low loss transmission characteristics have existed for at least two decades. The low attenuation characteristics of the fibers are limited by scattering, absorption and bending losses in the fibers.

Optical fiber cores having a reduced refractive index and therefore requiring less core dopants were made feasible with the introduction of fiber with a depressed index cladding (DIC). These fibers are inherently lower in attenuation due to both the lower absorption losses in the less doped core and less scattering loss due to the tighter optical mode confinement. However, depressed index clad fibers suffer from a fundamental mode loss phenomena at longer wavelengths due to “tunneling” through the depressed well. Very thick depressed cladding has been used to minimize the tunneling effect, but this cladding design makes production of these fibers less economical.

The apparent fundamental mode cutoff wavelength  $\lambda_{fc}$  is the smallest operating wavelength that a single mode fiber will propagate the fundamental mode where the loss is about 1dB/m in a straight section of fiber. Beyond this wavelength, the 1st-order mode becomes lossy and radiates out of the fiber core.

The operating wavelength  $\lambda_{op}$  of the optical fiber should be transmitted with very

little loss. As the wavelength of light propagating in the fiber becomes longer than the apparent fundamental mode cutoff wavelength  $\lambda_{fc}$ , the fundamental mode becomes increasingly lossy.

As light of test wavelengths successively longer than the apparent fundamental cutoff wavelength  $\lambda_{fc}$  are launched into the optical fiber, more and more power leaks through the fiber cladding. As the fundamental mode extends into the cladding material, it also becomes increasingly sensitive to bending loss even though near the  $\lambda_{fc}$  the bend sensitivity is actually less than in a standard step index fiber.

A combination of preferred index levels and core/DIC diameters were discovered that assured low losses in both the 1300nm and 1550nm operating window of silica-based optical fibers. Typically, these depressed index clad fibers resulted in less than 0.1dB/km of additional loss at 1550nm compared to the 1300nm loss level. These designs were optimized for minimizing fundamental mode loss at the longer 1550nm operating wavelengths thereby permitting the future upgrading of these links to the longer wavelength.

The lossy characteristic for depressed index clad fiber was considered an undesirable problem and the bulk of the research has generally been directed at fiber designs that minimize its effects.

One of the few fiber applications to take advantage of the lossy fundamental mode characteristic of these fibers is the polarizing fiber design of J. R. Simpson, et al. Journal of Lightwave Technology, 1983. In this design, a special birefringence-generating elliptical cladding structure having a depressed index is used to selectively attenuate one of the two orthogonal fundamental mode polarizations, resulting in the propagation of a single polarization mode. The "fast" axis polarization tunneled through the depressed cladding and radiated out to the lossy mode stripping coating, resulting in the propagation of a single polarization. The "slow" propagating mode also suffered from the same tunneling effect but at a slightly longer wavelength, thereby providing the polarizing wavelength window. Unfortunately, only several tens of nanometers of useable bandwidth has generally been possible with these fibers, which has limited their use to narrow line width laser sources. Also, this fiber design relied heavily on controlled tight bending of the fiber in order to tune the wavelength of the useful operating window.

Another approach to achieving a lossy fiber design has been through the incorporation of certain transition metal dopants in the core. Examples of these types of fibers are described in U.S. Patents 4,881,793, 5,572,618 and 5,633,974. Because these dopants are not very wavelength specific in their attenuating characteristics and therefore provide relatively high attenuation at the desired low loss operating wavelengths, they are generally unsuitable for pigtailed applications.

Telecommunication systems can also suffer from a loss of signal when optical fibers are joined. To this end, pieces of optical fiber are usually joined together by fusion splicing with the fiber cores aligned. However, the losses are best minimized by reducing the transition of the electromagnetic field as light moves from one fiber to another. This is called mode matching, and is conceptually similar to impedance matching in electrical circuit design. To accomplish mode matching, the mode field diameters of the joined fibers are made equal.

In discussing the step index of optical fibers, it should be noted that because of the manufacturing processes employed, real optical fibers rarely have perfectly square refractive index profiles. There may be diffusion of dopants at the boundaries of the regions, and the core may exhibit a "germanium burnoff dip" at its center. To account for this non-square index profile, there are standard algorithms for calculating an equivalent step index.

### **SUMMARY OF THE INVENTION**

In accordance with the present invention, a single mode optical fiber is provided that operates with very low attenuation at the pump wavelength while providing very high attenuation at certain longer wavelengths. Typically, the attenuation is less than about 0.050 dB/meter at the pump wavelength and greater than about 1 dB/meter at the absorption wavelength.

The optical fiber includes a core region that is photosensitive, thereby permitting the writing of reflective gratings in the fiber for pump stabilization. The photosensitivity can be made sufficient to eliminate the need for H<sub>2</sub> or D<sub>2</sub> loading or other photosensitizing processes prior to the grating writing process.

The fiber can be easily spliced or connected to common wavelength selective couplers and other pigtail fibers with minimal losses.

These attributes are obtained in a DIC single mode fiber design having a core doped with photosensitizing compositions and having a mode field diameter that closely matches or can be made to closely match adjoining fibers. More specifically, the fiber design has a raised index between about 0.000 and 0.010, a depressed index between about 0.002 and 0.015 and a ratio of DIC diameter to core diameter within the range of about 2 to about 10, preferably within the range of about 2 to about 7, more preferably within the range of about 2 to about 5.5, and most preferably within the range of about 2.6 to about 5.1. Photosensitizing core compositions may include  $\text{GeO}_2/\text{SiO}_2$  and  $\text{GeO}_2$  co-doped with  $\text{B}_2\text{O}_3/\text{SiO}_2$ . The DIC composition may be a fluorine doped silica composition or a boron doped silica composition.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Other objects, advantages, features and characteristics of the present invention, as well as methods, operation and functions of related elements of structure, and the combination of parts and economies of manufacture, will become apparent upon consideration of the following description and claims with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures, and wherein:

Figure 1 shows a cross-section of a depressed inner clad fiber.

Figure 2 shows the general index/geometry profile of the fiber shown in Figure 1.

Figure 3 shows the specific index/geometry profile of a first embodiment of the inventive fiber.

Figure 4 shows the specific index/geometry profile of a second embodiment of the inventive fiber.

Figure 5 shows the attenuation characteristic of the first embodiment of the inventive fiber near the operating wavelength  $\lambda_{\text{op}}$ .

Figure 6 shows the attenuation characteristic of the second embodiment of the inventive fiber near the operating wavelength  $\lambda_{\text{op}}$ .

Figure 7 shows the attenuation characteristic of the second embodiment of the longer high attenuating wavelength  $\lambda_{hi}$ .

Figure 8 shows the bend sensitivity of the attenuation characteristic near the operating wavelength  $\lambda_{op}$ .

Figure 9 shows an optical communication system.

Figure 9a shows an optical communication system including a forward pumped erbium-doped fiber laser.

Figure 9b shows an optical communication system including a counter-pumped erbium-doped fiber laser.

Figure 9c shows an optical communication system including a forward pumped erbium-doped fiber amplifier.

Figure 9d shows an optical communication system including a forward pumped erbium-doped fiber amplifier.

### **DETAILED DESCRIPTION**

In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical and electrical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the invention, the description may omit certain information known to those skilled in the art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

Referring to the drawings, Figure 1 shows a simple cross-section of a depressed inner clad single mode fiber 10, a core region 11, a depressed inner clad region 12 and an outer clad region 13. The primary difference between this design and a standard step index single mode fiber is that, in the standard design, the index of region 12 would be matched to the index of the outer cladding.



Figure 2 shows both the equivalent step index profile of the DIC fiber as well as the critical geometric dimensions. The core region 11 of the DIC fiber has an index of  $n_c$ . The outer clad region 13 has an index of  $n_2$ . The index of the core region 11 is greater than the index of the outer clad region 13. The difference between the index of the core region 11 and the index of the outer clad region 13 is called the raised index,  $\Delta n^+$ , i.e., ( $n_c - n_2 = \Delta n^+$ ).

The depressed inner cladding region 12 has an index of  $n_1$ . The index of the depressed inner clad region 12 is less than the index of the outer cladding 13. The difference between the index of the inner clad region 12 and the index of the outer cladding 13 is called the depressed index,  $\Delta n^-$ , i.e., ( $n_2 - n_1 = \Delta n^-$ ).

The diameter of the core is  $2a$  while the diameter of the depressed inner cladding is  $2b$ . In the preferred embodiment,  $2b$  is typically greater than twice  $2a$ .

To set the core index  $n_c$  greater than the outer cladding index,  $n_2$ , the core silica contains index raising dopants such as:  $P_2O_5$ ;  $GeO_2$ ; co-dopants  $GeO_2$  and  $B_2O_3$ ;  $P_2O_5$  and  $B_2O_3$ ; or  $GeO_2$ ,  $P_2O_5$  and  $B_2O_3$ . Setting the index of the inner clad index  $n_1$  can be achieved by doping silica with either fluorine or boron and may include other co-dopants such as  $P_2O_5$  or  $GeO_2$ . The outer cladding index  $n_2$  typically matches silica and may be a pure silica composition or a silica composition containing fluorine or boron and co-doped with  $P_2O_5$  or  $GeO_2$ .

The core region 11 may be made photosensitive with the use of germanium or boron dopants. A fiber is photosensitive when at least one of the material components comprising the fiber permanently changes physical properties upon exposure to actinic radiation. Preferably, the refractive index of the material is the property that is permanently affected. Making the core region photosensitive allows Bragg gratings to be written into the fiber, by exposing a region of the fiber to a pattern of ultraviolet light. In the alternative, long period gratings can be written in place of the Bragg gratings.

The index and geometry profile of a first preferred embodiment of the invention is shown in Figure 3. The first preferred embodiment has a raised index  $\Delta n^+$  of 0.0018, a depressed index  $\Delta n^-$  of 0.0060, a core diameter  $2a$  of  $8.0\mu m$  and a depressed inner clad diameter of  $21\mu m$ . A fiber having a small depressed inner clad to core diameter ratio such

as this is sometimes referred to as a “W” fiber and represents a narrow depressed well case.

This fiber has an outer diameter of  $125\mu\text{m}$ , resulting in a second mode cutoff wavelength of  $930\text{nm}$  and a mode field diameter of  $6.4\mu\text{m}$  when measured at  $980\text{nm}$ . The attenuation characteristics near the operating wavelength  $\lambda_{\text{op}} = 980\text{nm}$  are shown in Figure 5. Although an acceptable attenuation of about  $60\text{dB/km}$  can be achieved for a typical one meter pigtail length, it is clear that the fundamental mode may show tunneling tendencies at the operating wavelength, and therefore does not have a flat, low loss operating region.

At  $1550\text{nm}$ , the attenuation of a straight piece of fiber may exceed  $10\text{dB/meter}$ . This fiber represents one of the limits of the DIC fiber design space. A smaller well width would result in even higher operating wavelength losses, as the fundamental mode tunneling would have been even stronger. Another problem with this design is the high sensitivity of the operating wavelength attenuation to slight variations in manufacturing conditions during fiber production. For example, if the  $2^{\text{nd}}$  mode cutoff were to shift  $50\text{nm}$  to  $880\text{nm}$ , the attenuation in the  $980\text{nm}$  window would increase to about  $200\text{dB/km}$  or  $0.2\text{dB}$  for a one meter pigtail. This would be an unacceptable additional insertion loss for many applications.

A second preferred embodiment is represented by the refractive index/geometry profile shown in Figure 4. In this second preferred embodiment, the core has a raised index  $\Delta n^+$  of  $0.0011$ , a depressed index  $\Delta n^-$  of  $0.0060$ , a core diameter  $2a$  of  $6.1\mu\text{m}$  and a depressed inner clad diameter of  $31\mu\text{m}$ . This wider depressed well design is still narrower than typical DIC fiber used in long transmission link applications. This fiber has a second mode cutoff of  $920\text{nm}$  and a mode field diameter at  $980\text{nm}$  of  $5.9\mu\text{m}$  which is identically matched to Flexcore 1060, a common pigtailed fiber made by Corning, Inc. The attenuation characteristic of this fiber near the operating wavelength  $\lambda_{\text{op}} = 980\text{nm}$  is shown in Figure 6. The attenuation in the pump wavelength region of  $970\text{-}1000\text{nm}$  is less than  $10\text{dB/km}$  and is essentially flat. A  $40\text{nm}$  shift in the  $2^{\text{nd}}$  mode cutoff of this fiber to  $880\text{nm}$  would result in an increase in the attenuation of about  $4\text{dB/km}$  to about  $9\text{dB/km}$  – an insignificant increase of  $0.004\text{dB}$  for a one meter pigtail.

The long wavelength attenuation characteristic is shown in Figure 7 and shows that the attenuation of wavelengths  $\lambda_{hi}$  over the erbium "C" band is a minimum of 15dB/meter in a straight fiber configuration.

Low loss splicing to conventional pigtail fibers such as SMF 28 and Flexcore 1060 (made by Corning, Inc.) is needed to make the fiber design practical. Splice losses of less than 0.12dB have been measured on these designs using conventional fusion splicing technology. This low loss is attributable to the excellent mode match possible with these DIC designs. For designs having less than perfect mode matches, it is possible to use special fusion splicing programs that provide enough core diffusion to effectively mode match the fibers in the local region of the splice. A slightly mismatched design resulted in average splice losses of less than 0.05dB when spliced to Flexcore 1060 and SMF 28.

Gratings having 3% reflectivity (0.13dB) can be written in non-H<sub>2</sub> loaded fiber in accordance with the invention in about 50 seconds. Since a normal pump stabilizing grating requires only about 2-3% reflectivity, the fiber is sufficiently photosensitive for non-H<sub>2</sub> loaded grating fabrication. A Bragg grating of 3% reflectivity was written in a hydrogen loaded fiber of this design in less than 10 seconds, while a Flexcore 1060 fiber similarly loaded with H<sub>2</sub> required about 60 seconds to achieve a comparable reflectivity.

Another feature of the fiber design is the incorporation of boron in the core to create a fiber that has a high UV photosensitivity. Boron in a co-doped germanium silicate composition creates the necessary high UV photosensitivity while providing a relatively low refractive index in the core needed for these DIC designs. The low refractive index of the core counters the numerical aperture increase that results from the depressed well design. This fiber design permits mode matching of the fiber to conventional fibers.

Very strong gratings can be written into these types of fiber. For example, a 45dB reflector (37dB after annealing) was written into a 1550nm operating wavelength fiber drawn from a milled version of the same preform used for the 980nm fiber of the first embodiment. The fiber was H<sub>2</sub> loaded for 4 days at 70°C and 2000psi. It took only 5 minutes using a 270 mJ/cm<sup>2</sup> pulse fluence, 50 Hz pulse rate, from a 248 nm KrF excimer laser to achieve this grating strength in a 3mm long grating.

In applications where the pump pigtail fiber operating wavelength  $\lambda_{op}$  is relatively

close to the wavelength which is to be strongly attenuated, as for example when a 1480nm pump laser is used to pump an erbium-doped fiber amplifier operating in L-band (1570-1610 nm), it may be desirable to use the pigtail fiber in a coiled configuration having a controlled bend radius. The controlled bending can be used to steepen the loss vs. wavelength curve at the apparent fundamental mode cutoff wavelength. This can increase the difference in optical loss between the closely spaced transmission and loss wavelengths. (See for example, Liang, et al., "Optimum configuration and design of 1480-nm pumped L-band gain-flattened EDFA using conventional erbium-doped fiber", Optics Communications 183 (2000) 51-63, and Simpson, et al., "A Single-Polarization Fiber", Journal of Lightwave Technology, Vol. LT-1, No. 2, June 1983.)

Figure 8 compares the attenuation vs. wavelength of the first embodiment (narrow depressed index well design, 3M fiber drum number 3325, whose effective step index profile is shown in Figure 3) with that of the second embodiment (wide depressed well design, 3M fiber drum number 3411, whose effective step index profile is shown in Figure 4). For each test, approximately 300m of the sample fiber was wrapped around a spool having the specified diameter (305mm, 152mm, or 44mm). The attenuation vs. wavelength was then measured for each spool. The graph shows that the attenuation vs. wavelength increases much more rapidly for the narrow depressed index well design ( $2b/2a = 2.6$ ) than for the wider well design ( $2b/2a = 5.1$ ) as the input wavelength is increased beyond the intended operating wavelength (approximately 980nm). Other test results (not shown) indicated that the wide well design fiber attenuation did not exceed 200dB/km until about 1150nm, and the attenuation increased greatly beyond about 1200nm. This indicates that a wider depressed well design provides a wider low loss region around the operating wavelength, thus permitting a greater tolerance for lot-to-lot variations in manufacturing processes. The attenuation vs. wavelength curves for the narrow depressed well design noticeably demonstrate an increase in attenuation and a steeper attenuation curve for smaller bend radii. This effect could be used to advantage if the wavelength which must be strongly attenuated lies very close to the intended operating wavelength.

Figure 9 depicts a fiber optic communication system 900. Source 910 emits radiation at an operating wavelength of  $\lambda_{op}$ . For example, the source 910 would preferably be a pump laser operating at a wavelength  $\lambda_{op}$  in the range of 950-1050nm. In an alternate embodiment, the pump laser operates at a wavelength  $\lambda_{op}$  in the range 1450 – 1510nm. The source 910 is optically connected to an accepting device 930 through an optical fiber 920. For example, the accepting device 930 could be a laser, such as an Erbium-Doped Fiber Laser (EDFL), as shown in figures 9a and 9b, or an amplifier, such as an Erbium-Doped Fiber Amplifier (EDFA), as shown in figures 9c and 9d. The accepting device could be forward pumped, as shown in figures 9a and 9c, or counter-pumped, as shown in figures 9b and 9d.

The accepting device 930 is generally designed to receive radiation at the operating wavelength  $\lambda_{op}$ . The accepting device 930 processes the radiation received at operating wavelength  $\lambda_{op}$  through optical fiber 920 and outputs signal radiation at a signal wavelength  $\lambda_s$  through an output optical fiber 940 to an optical receiver 980. The optical receiver 980 could include wavelength demultiplexing devices, optical-to-electrical signal conversion devices, or other similar optical receiving devices known in the art. The wavelength of the radiation generated by accepting device 930  $\lambda_s$  is typically longer than the operating wavelength  $\lambda_{op}$  of source 910.

The optical communication system may also include signal source 990 outputting a signal at wavelength  $\lambda_s$  through optical fiber 950 to optical coupler 960. The signal source 990 could be, for example, a semiconductor laser (a laser diode) or an erbium-doped fiber laser which has an external signal modulator, or other similar signal sources known in the art.

As shown in Figure 9a, the accepting device 930 is a forward pumped optical laser. Radiation at operating wavelength  $\lambda_{op}$  is emitted from the source 910 through optical fiber 920. Optical fiber 920 preferably includes a Bragg grating 970 which reflects back a small percentage of the radiation to source 910. The remainder of the radiation is received by the optical laser, which emits radiation at a signal wavelength  $\lambda_s$  through optical fiber 940 to optical receiver 980. Optical fiber 920 attenuates radiation transmitted at wavelength  $\lambda_s$ .

As shown in Figure 9b, the accepting device 930 is a counter pumped optical laser. Radiation at operating wavelength  $\lambda_{op}$  is emitted from the source 910 through optical fiber

920. Optical fiber 920 preferably includes a Bragg grating 970 which reflects back a small percentage of the radiation to source 910. The remainder of the radiation is received by an optical coupler 960, which transmits the radiation at the operating frequency to the optical laser through the output fiber 940. Coupling device 960 could be, for example, a wavelength-selective fiber optic coupler as is known in the art.

As shown in Figure 9c, the accepting device 930 is a forward pumped optical amplifier. An input fiber 950 carries an optical signal at wavelength  $\lambda_s$  from a signal source 910 to the amplifier 930. Radiation at operating wavelength  $\lambda_{op}$  in fiber 920 from light source 910 and incoming signal radiation at signal wavelength  $\lambda_s$  from input fiber 950 can be combined at the same input port of the optical amplifier by means of a coupling device 960.

In another embodiment shown in Figure 9d, accepting device 930 is a "counter pumped" optical amplifier. Radiation at wavelength  $\lambda_{op}$  from light source 910 is transmitted through fiber 920 into coupling device 960 and subsequently enters the optical amplifier through the output optical fiber 940 to optical receiver 980.

In all of these configurations, it is desirable that wavelengths near the signal wavelength  $\lambda_s$  be strongly attenuated in the pump laser pigtail, optical fiber 920. Such longer wavelength attenuation will prevent back reflections of light from accepting device 930 near signal wavelength  $\lambda_s$  from causing unstable operation of the accepting devices 930. Strongly attenuating wavelength  $\lambda_s$  in fiber 920 will also protect light source 910 from instability or damage (particularly in the case of a "counter pumped" amplifier or laser).

The optical fiber 920 may optionally have a reflective Bragg grating 970 written into it. This Bragg grating preferably reflects about 2% of the radiation at  $\lambda_{op}$  emitted by the light source 910 back to the light source 910. This reflected radiation serves to help stabilize the wavelength of the output of the light source.

Preferably, the accepting device 930 is an amplifier or laser that includes erbium ions incorporated into a glass matrix. When the amplifier receives the radiation from the light source 910, the radiation excites the erbium atoms with the shorter wavelength, higher energy photons emitted by the light source 910. The radiation raises many atoms to

an excited state, creating population inversion. The incoming signal radiation causes stimulated emission, as in a laser, producing an amplified signal for output.

Other possible pump wavelengths for other fiber designs could also use this concept, but in the preferred embodiments, the pump wavelength will be spaced away from the amplifying wavelength range. This may also be useful in certain sensor applications where high attenuation of longer wavelength signals is desired and an isolator or a filter could be eliminated.

Although the invention has been described with a certain degree of particularity, it should be recognized that elements thereof may be altered by persons skilled in the art without departing from the scope of the invention. The invention is limited only by the following claims and their equivalents.

## WHAT IS CLAIMED IS:

1. An optical fiber (10) having an operating wavelength  $\lambda_{op}$ , an apparent fundamental mode cutoff wavelength  $\lambda_{fc}$ , and an attenuation wavelength  $\lambda_a$ ; wherein  $\lambda_{op} < \lambda_{fc} < \lambda_a$ , and wherein the optical loss of the fiber at  $\lambda_a$  is at least 1 dB/m greater than the loss at  $\lambda_{op}$ .
2. The optical fiber of claim 1, wherein the optical loss at  $\lambda_{op}$  is less than 100 dB/km.
3. The optical fiber of claim 1, wherein the optical loss at  $\lambda_{op}$  is less than 10 dB/km.
4. The optical fiber of claim 1, wherein the optical loss at  $\lambda_{op}$  is less than 4 dB/km.
5. The optical fiber of claim 1, wherein the optical loss of the fiber at  $\lambda_a$  is at least 1 dB/m greater than the loss at  $\lambda_{op}$  when the fiber is straight.
6. The optical fiber of claim 1, wherein the fiber is a single mode fiber at the operating wavelength  $\lambda_{op}$ .
7. The optical fiber (90) of claim 6 in combination with a second optical fiber (940), wherein the optical fiber is spliced to the second optical fiber, and wherein the optical fiber has a mode field diameter at the operating wavelength  $\lambda_{op}$  that is within  $\pm 10\%$  of the mode field diameter of the second optical fiber at the operating wavelength  $\lambda_{op}$ .
8. The optical fiber of claim 7, wherein the second optical fiber is a commercial telecommunications fiber.
9. The optical fiber of claim 8, wherein the optical fiber is fusion spliced to the second optical fiber such that the optical loss attributable to the splice is no more than 0.2 dB.




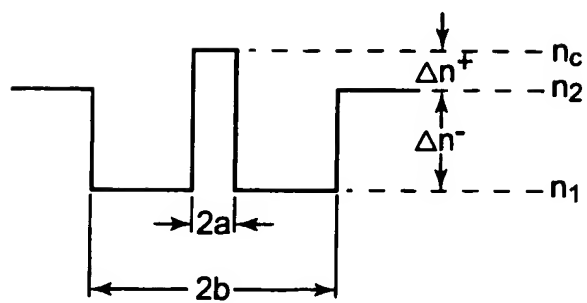
10. The optical fiber of claim 1, wherein the optical loss of the fiber at all wavelengths greater than  $1.05\lambda_{fc}$  is at least 1 dB/m greater than the loss at  $\lambda_{op}$ .
11. The optical fiber of claim 1, wherein the optical fiber has a core (11) surrounded by a cladding (12), and wherein the core is photosensitive.
12. The optical fiber of claim 11, wherein the optical fiber core and cladding have substantially equal photosensitivity.
13. The optical fiber of claim 11, wherein the optical fiber core is sufficiently photosensitive that a 2% reflective Bragg grating refractive index structure may be written in the fiber by exposing it to an interference pattern from an ultraviolet laser source for less than about 5 minutes without first hydrogen loading the optical fiber.
14. The optical fiber of claim 11, further comprising a refractive index grating structure (970).
15. The optical fiber of claim 14, wherein said refractive index grating structure is selected from the group consisting of Bragg gratings and long period gratings.
16. The optical fiber of claim 1, comprising:
  - a core region with a diameter within the range of about  $4.0\mu\text{m}$  to about  $10.0\mu\text{m}$ ;
  - a depressed inner clad region with a diameter within the range of about  $8\mu\text{m}$  to about  $50\mu\text{m}$ ; and
  - an outer clad region;wherein the optical fiber has a raised refractive index within the range of about 0 to about 0.010 and a depressed refractive index within the range of about 0.002 to about 0.015.
17. The optical fiber of claim 16, wherein the DIC to core diameter ratio is within the range of about 2.0 to about 7.0.

18. An optical fiber filter adapted for use in a communications system (900), comprising:  
the optical fiber of claim 1 to 17.
19. The optical fiber filter of claim 18, wherein the filter is disposed within the communications system (900) in the optical path between a first source (910) which emits radiation at wavelength  $\lambda_{op}$  and a second source (990) which emits radiation at wavelength  $\lambda_a$ .
20. The optical fiber filter of claim 19, wherein  $\lambda_{op}$  is within the range of about 950nm to about 1010 nm.
21. The optical fiber filter of claim 19, wherein  $\lambda_{op}$  is within the range of about 1450nm to about 1510 nm.
22. The optical fiber filter of claim 19, wherein  $\lambda_{op}$  is within the range of about 1520nm to about 1610 nm.
23. The optical fiber filter of claim 19, wherein the first source is a first laser and the second source is an optical amplifier.
24. The optical fiber filter of claim 23, wherein the optical amplifier is an erbium-doped fiber amplifier.
25. The optical fiber filter of claim 19, wherein the first source is a first laser and the second source is an second laser.
26. The optical fiber filter of claim 25, wherein the second laser is an erbium-doped fiber laser.

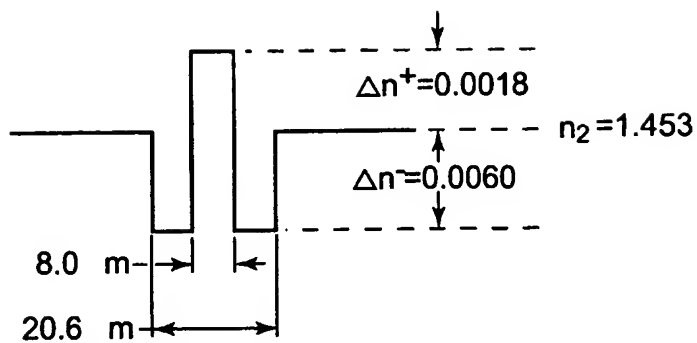
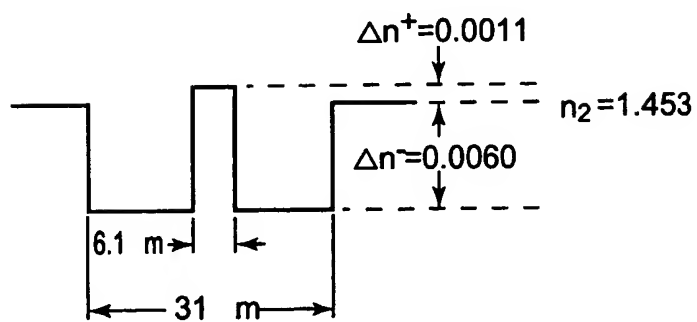
27. The optical fiber filter of claim 19, wherein said refractive index grating structure is a Bragg grating which reflects at least a portion of the light of wavelength  $\lambda_{op}$ , and further wherein the first source emits light of wavelength  $\lambda_{op}$ .
28. The optical fiber filter of claim 27, wherein the Bragg grating is adapted to function as an external cavity reflector to stabilize the output of the first source at wavelength  $\lambda_{op}$ .
29. A pump laser assembly, comprising:  
a first laser equipped with an optical fiber pigtail, said optical fiber pigtail having the optical fiber of any one of claims 1-17.
30. The pump laser assembly of claim 29, wherein the Bragg grating functions as an external cavity reflector to stabilize the output of the laser at wavelength  $\lambda_{op}$ .
31. The pump laser assembly of claim 29, adapted to pump a first source which emits radiation at wavelength  $\lambda_a$ .
32. The pump laser assembly of claim 31, wherein said first source is a second laser.
33. The pump laser assembly of claim 31, wherein said first source is an optical amplifier.
34. A fiber optic communication system (900), comprising:  
a source (910) which emits radiation at operating wavelength  $\lambda_{op}$ ;  
an accepting device (930) adapted to receive radiation at wavelength  $\lambda_{op}$ ; and  
an optical fiber filter in optical communication with said light source and said accepting device;  
wherein said optical fiber filter comprises an optical fiber (920) having an operating wavelength  $\lambda_{op}$ , an apparent fundamental mode cutoff wavelength  $\lambda_{fc}$ , and an attenuation wavelength  $\lambda_a$ , wherein  $\lambda_{op} < \lambda_{fc} < \lambda_a$ , and wherein the optical loss of the fiber at  $\lambda_a$  is at least 1 dB/m greater than the loss at  $\lambda_{op}$ .

35. The fiber optic communication system of claim 34, wherein the optical loss of the fiber at all wavelengths greater than  $1.05\lambda_{fc}$  is at least 1 dB/m greater than the loss at  $\lambda_{op}$ .
36. The fiber optic communication system of claim 34, wherein the fiber has a refractive index grating structure (970) selected from the group consisting of Bragg gratings and long period gratings.
37. The fiber optic communication system of claim 36, wherein the Bragg grating is adapted to function as an external cavity reflector to stabilize the output of the light source at wavelength  $\lambda_{op}$ .
38. The fiber optic communication system of claim 34, wherein the source is a pump laser and the accepting device is selected from the group consisting of an erbium-doped fiber laser and an erbium-doped fiber amplifier.
39. The fiber optic communication system of claim 34, wherein the optical fiber comprises:  
a core region with a diameter within the range of about  $4.0\mu\text{m}$  to about  $10.0\mu\text{m}$ ;  
a depressed inner clad region with a diameter within the range of about  $8.0\mu\text{m}$  to about  $50\mu\text{m}$ ; and  
an outer clad region;  
wherein the optical fiber has a raised refractive index within the range of about 0 to about 0.010 and a depressed refractive index within the range of about 0.002 to about 0.015.
40. The fiber optic communication system of claim 34, wherein the DIC to core diameter ratio is between about 2.0 and 7.0.

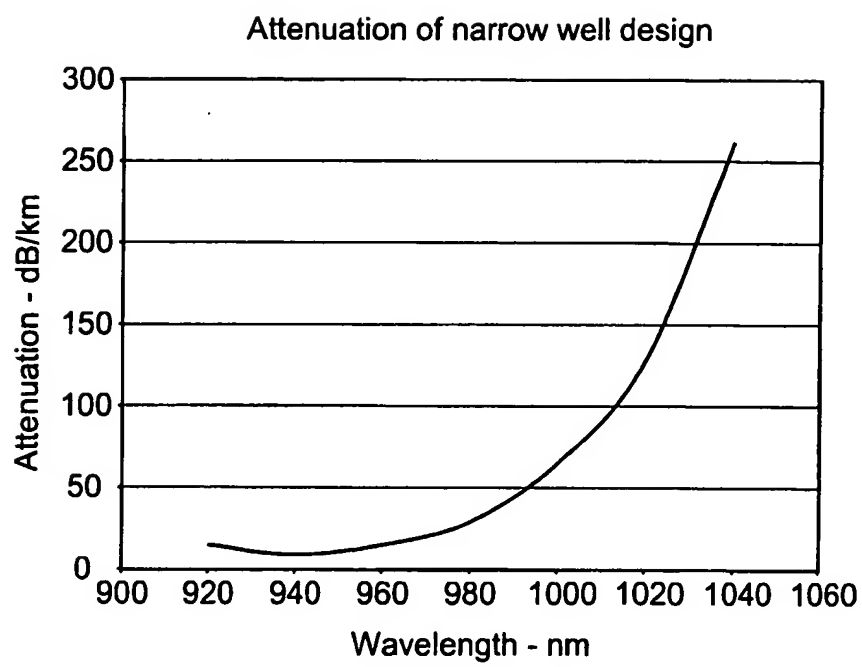
1/7

**Fig. 1****Fig. 2**

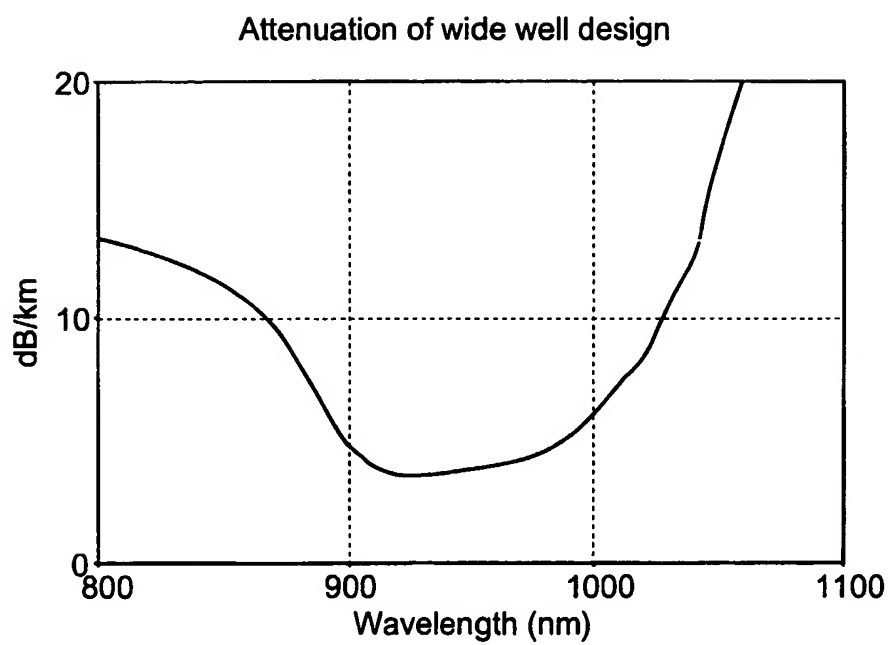
2/7

**Fig. 3****Fig. 4**

3/7

**Fig. 5**

4/7

**Fig. 6**



5/7

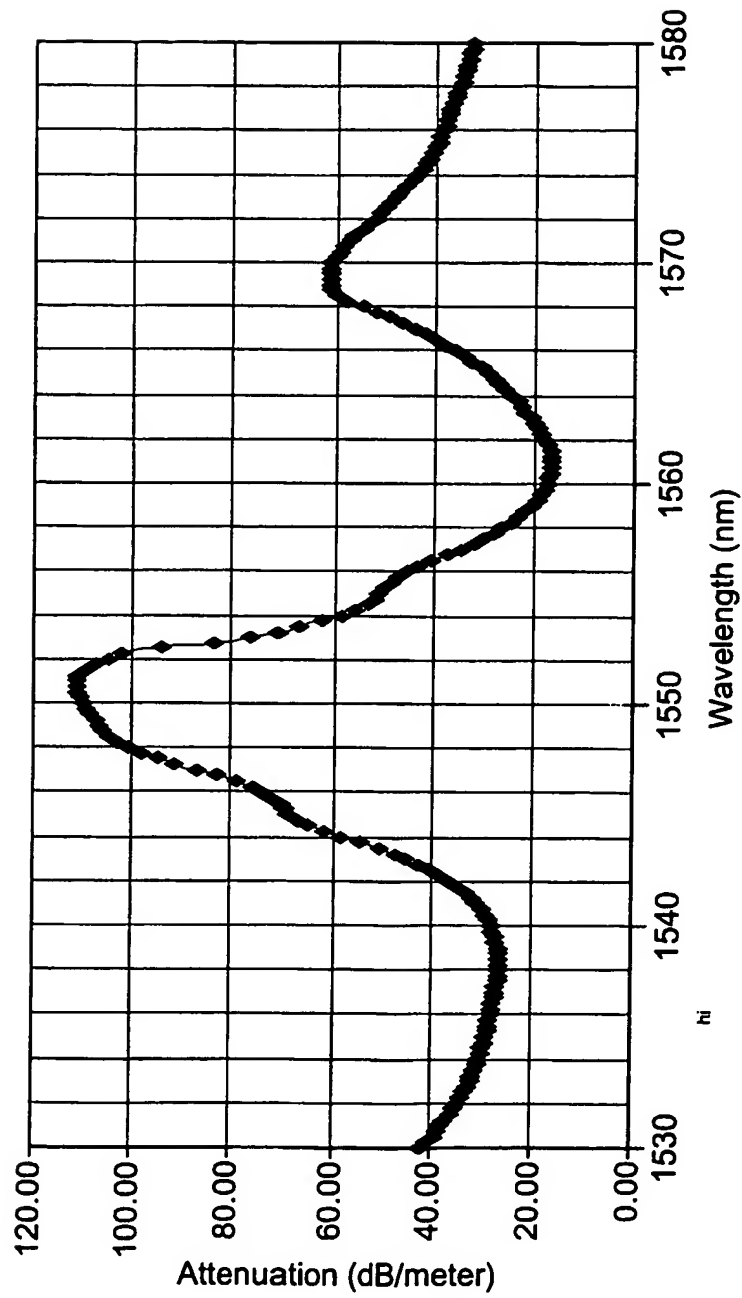
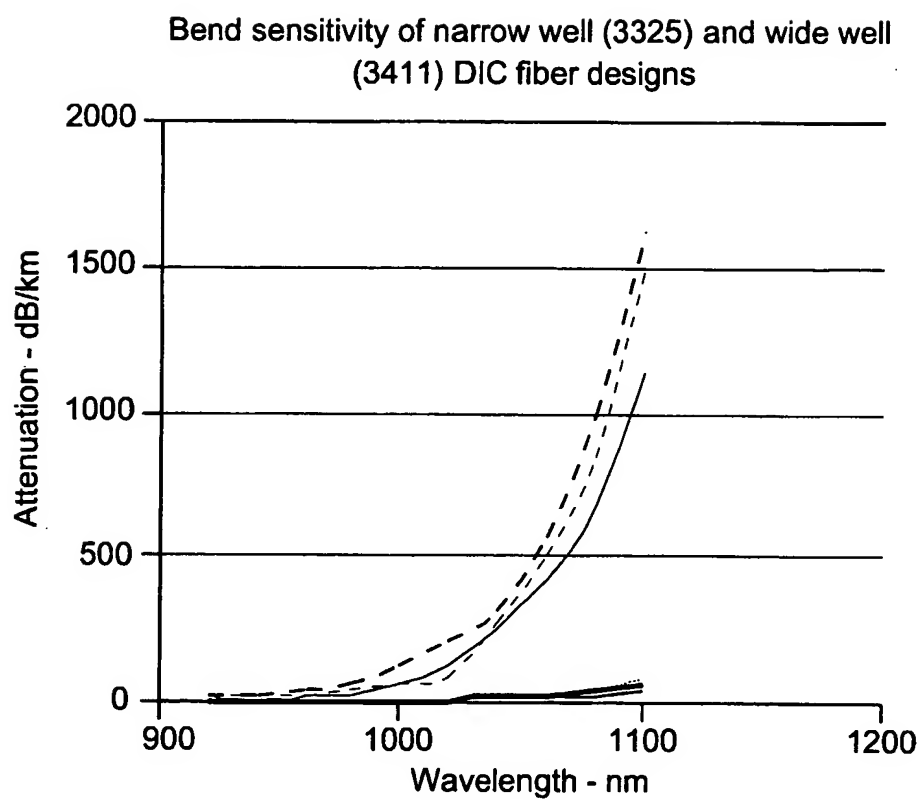


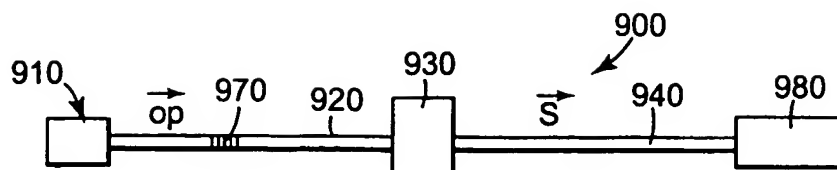
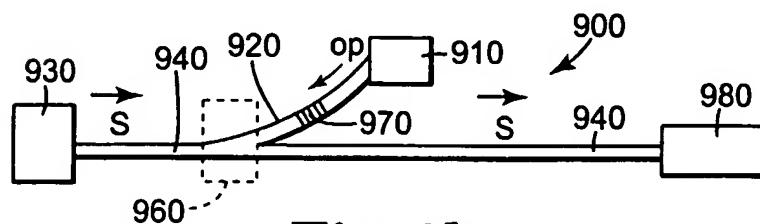
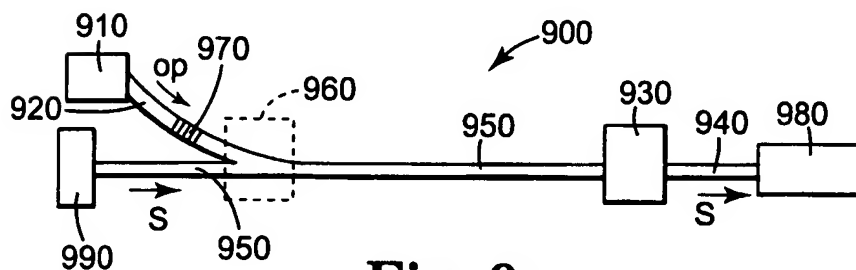
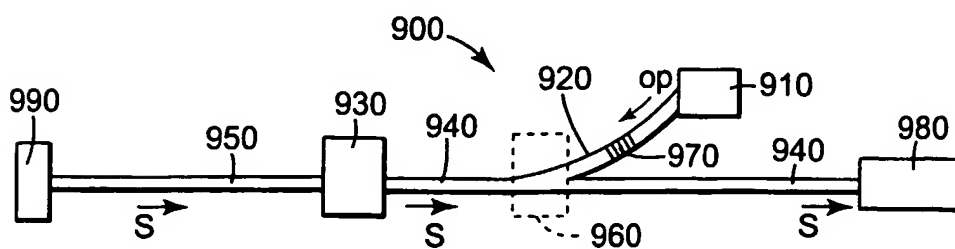
Fig. 7

6/7

**Fig. 8**

— 3411 - 305mm  
— 3411 - 152mm  
... 3411 - 44mm  
— 3325 - 305mm  
- - - 3325 - 152mm  
- . - 3325 - 44mm

7/7

**Fig. 9a****Fig. 9b****Fig. 9c****Fig. 9d**

**THIS PAGE BLANK (USPTO)**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 July 2002 (04.07.2002)

PCT

(10) International Publication Number  
**WO 02/052311 A3**

(51) International Patent Classification<sup>7</sup>: G02B 6/02, H01S 3/13, 3/067, G02B 6/16, 6/22, H01S 3/094

(21) International Application Number: PCT/US01/43762

(22) International Filing Date:  
16 November 2001 (16.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/252,289 21 November 2000 (21.11.2000) US  
09/993,742 6 November 2001 (06.11.2001) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventor: VARNER, Wayne, F.; 3M Innovative Properties Company, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: HO, Néstor, F. et al.; 3M Innovative Properties Company, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

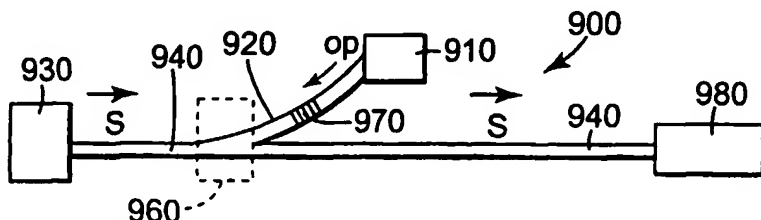
Published:

— with international search report

(88) Date of publication of the international search report:  
8 May 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: LASER PIGTAIL FIBER WITH INHERENT ATTENUATION CHARACTERISTIC



(57) Abstract: A fiber optic telecommunication system (900) with a pump laser (910) and an optical amplifier (930) is designed to stabilize the pump laser (910) while preventing back reflections from the pump laser (910) into the optical amplifier (930). The pump laser (910) emits radiation at a shorter wavelength, while the

optical amplifier (930) emits radiation at a longer wavelength. An optical fiber (920) is provided to connect the devices which has an ultraviolet photosensitive core, a low attenuation single mode wavelength region and a very high attenuation, longer wavelength region. The photosensitive core allows a weak Bragg grating (970) to be written into the fiber (920), to stabilize the pump laser (910). Apparent fundamental mode cutoff is accomplished with a depressed well design to attenuate the unwanted back reflections from the pump laser (910) into the amplifier (930). The pump laser (910) is also protected from longer wavelength signal amplifier or signal laser radiation.

WO 02/052311 A3

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 01/43762

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/02 H01S3/13 H01S3/067 G02B6/16 G02B6/22  
H01S3/094

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 363 234 A (VANCE MILES E ET AL) 8 November 1994 (1994-11-08)	1-10, 18-20, 23-26, 29, 31-35, 38
Y	column 4, line 8 - line 33; figures 1,3	27, 28, 30, 36, 37, 39, 40
X	US 6 009 222 A (DONG LIANG ET AL) 28 December 1999 (1999-12-28)	1-18
Y	column 6, line 6 - line 29; figure 1	27, 28, 30, 36, 37, 39, 40
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*G\* document member of the same patent family

Date of the actual completion of the international search

18 December 2002

Date of mailing of the international search report

02/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lord, R

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/43762

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 831 345 A (SUMITOMO ELECTRIC INDUSTRIES) 25 March 1998 (1998-03-25) figure 7; example 2	1-18
Y		27, 28, 30, 36, 37, 39, 40
A	WO 00 42684 A (LASERTRON INC ; KUSSMAUL ANDREAS (US)) 20 July 2000 (2000-07-20) figures 1, 2	27, 36
A	US 4 691 991 A (UNGER HANS-GEORG) 8 September 1987 (1987-09-08) the whole document	1, 16
A	HEWLETT S J ET AL: "COUPLING CHARACTERISTICS OF PHOTO-INDUCED BRAGG GRATINGS IN DEPRESSED- AND MATCHED-CLADDING FIBRE" OPTICAL AND QUANTUM ELECTRONICS, CHAPMAN AND HALL, LONDON, GB, vol. 28, no. 11, 1 November 1996 (1996-11-01), pages 1641-1654, XP002072666 ISSN: 0306-8919 the whole document	14, 16, 36, 39
A	WO 97 39460 A (ATX TELECOM SYSTEMS INC) 23 October 1997 (1997-10-23)  page 10, line 7 - line 33; figures 1, 4A	19, 23-26, 34, 38

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No  
**PCT/US 01/43762**

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5363234	A	08-11-1994	AU 677423 B2 AU 7435894 A CA 2132273 A1 DE 69404110 D1 DE 69404110 T2 EP 0650233 A1 JP 7170006 A	24-04-1997 04-05-1995 15-04-1995 14-08-1997 30-10-1997 26-04-1995 04-07-1995
US 6009222	A	28-12-1999	NONE	
EP 0831345	A	25-03-1998	JP 10082918 A AU 719606 B2 AU 2863997 A CA 2210282 A1 EP 0831345 A2 US 5883990 A	31-03-1998 11-05-2000 12-03-1998 09-03-1998 25-03-1998 16-03-1999
WO 0042684	A	20-07-2000	US 6330264 B1 AU 3208400 A CN 1340228 T EP 1149440 A1 JP 2002535842 T WO 0042684 A1	11-12-2001 01-08-2000 13-03-2002 31-10-2001 22-10-2002 20-07-2000
US 4691991	A	08-09-1987	EP 0131634 A1 DE 3376884 D1 JP 60021009 A	23-01-1985 07-07-1988 02-02-1985
WO 9739460	A	23-10-1997	AU 2545297 A WO 9739460 A1	07-11-1997 23-10-1997